


防爆电缆夹紧密封接头
Explosion-proof Cable Clamp Sealing Joint-CW



HX-CW		CE ROHS REACH	
材质:	黄铜 / 不锈钢 304/316L	Material:	Brass/SS304/SS316L
表面:	镀镍 / 钝化	Surface treatment:	Nickel plated,Passivation
密封件:	硅橡胶、氟丁橡胶	Sealing material:	Silicone rubber,Neoprene
防爆标识:	Exd IIC Gb	Explosion-proof:	Exd IIC Gb
阻燃等级:	UL94-V0	Flame retardant degree:	UL94-V0
防护等级:	IP66-10 巴压力	Protection degree:	IP66-10 bar
工作温度:	静态 -60℃至 100℃ 短时间 120℃ 动态 -20℃至 80℃短时间 100℃不含卤化物	Temperature:	Static state: -60℃to100℃, short time to120℃ Dynamic state: -20℃to80℃, short time to100℃




- 1.螺母 2.密封圈 3.入口接体 4.密封圈
5.中接体 6.锥度套 7.罩圈 8.压紧螺母
9.垫片 10.铠装电缆
1.nut 2.sealing ring 3.inlet connecting body
4.sealing ring 5.middle connecting body
6.taper sleeve 7.cover ring 8.nut 9.gasket
10.armored cable

规格参数 单位: mm

公制螺纹 M Metric thread	英制螺纹 G Inch screw threads	电缆外径 Outer diameter cable		螺纹长度 L1 Thread length	长度 L Length	长度 L2 Length	防爆标志 EX-mark	防护等级 Protection degree	产品编号 Code
		出线 Outgoing line A	进线 Incoming line B						
M16×1.5	—	5—8	7—15	15	75	85	Exd IIC Gb	IP66	HX-CW-"item"
M20×1.5	G1/2	5—12	8—15	15	75	85			
M25×1.5	G3/4	8—17	11—20	15	80	87			
M32×1.5	G1	11—22	14-27	17	88	92			
M40×1.5	G1 1/4	14—28	19-33	17	123	95			
M50×1.5	G1 1/2	16—33	22—40	17	123	100			
M63×1.5	G2	29—43	29—50	17	123	110			
M75×1.5	G2 1/2	38—57	35—63	17	142	127			
M85×1.5	G3S	38—72	41—77	18	144	127			
M90×1.5	G3	38—72	41-77	18	161	137			
M100×1.5	G4S	48—83	55-90	18	161	137			
M110×1.5	G4	48—94	61—104	18	166	137			

依据可以安装要求: 可提供 GL 螺纹加长
Customization:Accept lengthen GL thread.

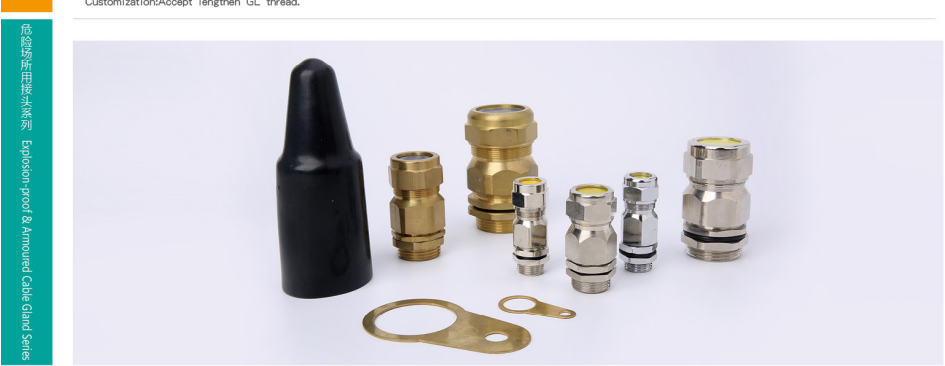

危险场所用接头系列
Explosion-proof & Armored Cable Joint Series