

# 船用填料函

Marine Cable Gland-TH Welded Type

TH


CE ROHS IP68 REACH

材质: 黄铜, 镀锌铁  
 密封件: 丁腈橡胶、硅橡胶  
 防水圈: 丁腈橡胶、硅橡胶  
 垫圈: 镀镍铁环

防水等级: IP54  
 工作温度: 静态: -40°C到 100°C, 短时间达 120°C  
 动态: -20°C到 80°C, 短时间达 100°C

Material: Brass, Galvanized iron  
 Hermetic seal: NBR、Silicone rubber  
 Metal Washer: Nickel-plated hoop  
 Protection degree: IP54

Temperature: Static state: -40 °C to 100 °C ,Short time to 120°C ;Dynamic state: -20 °C to 80 °C ,Short time to 100 °C

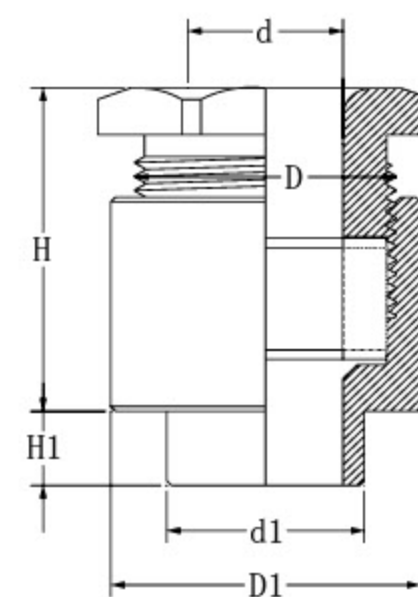

## 规格参数 单位: mm

规格 Item	适用范围 $\Phi$ Range	螺纹规格 D Thread	焊接长度 H1 Welded Length	安装孔径 d1 Mounting hole	接合长度 H Joint Length	扳手径 $\Psi$ Spanner size	产品编号 Code
TH-8	5-7	M16×1	3	13	32	18	HX-TH8
TH-13	6-12	M20×1	8	17	35	22	HX-TH13
TH-16	11-15	M27×1.5	8	22	40	30	HX-TH16
TH-19	14-18	M30×1.5	8	24	42	32	HX-TH19
TH-24	17-23	M35×1.5	8	30	44	36	HX-TH24
TH-28	22-27	M42×2	8	35	46	45	HX-TH28
TH-34	26-33	M47×2	8	42	49	50	HX-TH34
TH-42	32-41	M55×2	8	50	54	57	HX-TH42
TH-50	40-49	M62×2	8	58	56	64	HX-TH50
TH-58	48-57	M71×2	8	66	56	76	HX-TH58

