

# 金属减缩环



Metal Reducer

M / PG

CE ROHS

材质: 镀镍黄铜  
 防水圈: 丁腈橡胶、硅橡胶  
 防水等级: IP54  
 工作温度: 静态: -40°C到 100°C, 短时间达 120°C

Material: Nickel-plated brass  
 O-Ring: NBR、Silicone rubber  
 Protection degree: IP54  
 Temperature: Static state: -40°C to 100°C  
 short time to 120°C

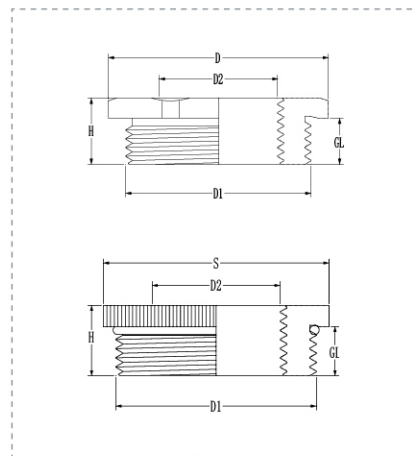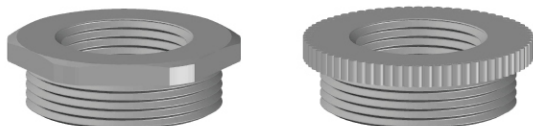

规格 Item	螺纹 Thread		螺纹长度 GL	高度 H Joint Length	扳手径 $\varnothing$ Spanner size	产品编号 Code
	Outer	Inner				
M16-M12	M16 × 1.5	M16 × 1.5	6	9	18	HX-REM16-M12
M20-M16	M20 × 1.5	M16 × 1.5	6.5	9.5	22	HX-REM20-M16
M25-M20	M25 × 1.5	M16 × 1.5	7.5	10.5	27	HX-REM25-M20
M32-M25	M32 × 1.5	M16 × 1.5	8	11.5	35	HX-REM32-M25
M40-M32	M40 × 1.5	M16 × 1.5	9	12.5	45	HX-REM40-M32
M50-M40	M50 × 1.5	M16 × 1.5	10	14	55	HX-REM50-M40
M63-M50	M63 × 1.5	M16 × 1.5	10	14	68	HX-REM63-M50
PG9-PG7	PG9	PG7	6	9	18	HX-REPG9-PG7
PG11-PG9	PG11	PG9	6.5	9.5	20	HX-REPG11-PG9
PG13.5-PG11	PG13.5	PG11	6.5	9.5	22	HX-REPG13.5-PG11
PG16-PG13.5	PG16	PG13.5	6.5	9.5	24	HX-REPG16-PG13.5
PG21-PG16	PG21	PG16	7.5	10.5	30	HX-REPG21-PG16
PG29-PG21	PG29	PG21	8	11.5	40	HX-REPG29-PG21
PG36-PG29	PG36	PG29	9	12.5	50	HX-REPG36-PG29
PG42-PG36	PG42	PG36	10	14	57	HX-REPG42-PG36
PG48-PG42	PG48	PG42	10	14	64	HX-REPG48-PG42

