

DPJ 端式软管接头

DPJ Ended Hose Fittings

M / G / PG

CE ROHS

材质: 黄铜镀镍 / 不锈钢 304/316L

护圈: TPE

密封垫: 改性橡胶

软管护口: 镀锌铁皮 / 不锈钢 304

防护等级: IP66

温度范围: -40°C至 105°C

需注明软管规格及螺纹尺寸。例 DPJ-15-G1/2", 一端 Φ15 软管, 另一端 G1/2" 外螺纹。

Material: Nickel-plated brass/SS304/SS316L

Retainer: TPE



Sealing ring: Modified rubber

Mouth: Galvanized steel / SS304

Protection degree: IP66

Temperature: -40°C to 105°C

Need to indicate hose specification and thread size, example DPJ-15-G1/2", one end 15 hose, the other end G1/2" external thread.

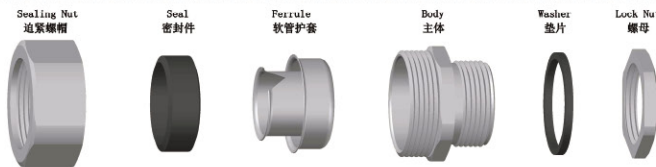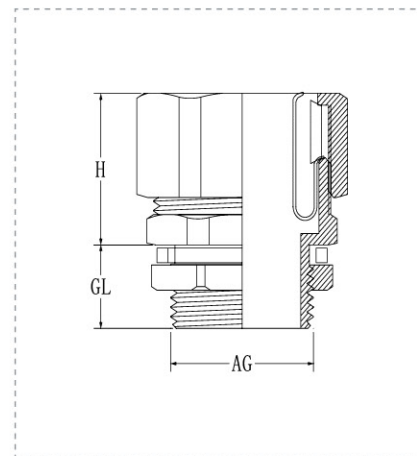

规格参数 单位: mm

适配软管尺寸 For conduit size		英制螺纹 Inch	螺纹长度 GL Thread Length	公制螺纹 Metric	螺纹长度 GL Thread Length	德制 PG	扳手尺寸 Spanner size	产品编号 Code
公制 Metric	英制 Inch							
Φ6	3/16"	G1/4"	7	M12/M14	7	PG7	18/16	HX-DPJ- "Conduit size"- "Tread type"
Φ8	5/16"	G3/8"	7	M14/M16	8	PG9	24/22	
Φ10	1/4"	G3/8"	7	M16	8	PG9	24/22	
Φ12 (13)	3/8"	G3/8"	10	M18/M20	10	PG11/PG13.5	26	
Φ15 (16)	1/2"	G1/2"	12	M20/M22/M24	10	PG13.5/PG16	30	
Φ20 (19)	3/4"	G3/4"	12	M25/M27/M30	12	PG21	35	
Φ25	1"	G1"	14	M32/M33/M36	12	PG29	43	
Φ32	1-1/4"	G1-1/4"	14	M36/M40/M42/M48	14	PG29	52	
Φ38 (40)	1-1/2"	G1-1/2"	16	M48/M50	14	PG36/PG42	60	
Φ51 (50)	2"	G2"	16	M60/M63/M64/M72	15	PG48	75	
Φ64 (70)	2-1/2"	G2-1/2"	24	M76	20		89/87	
Φ75 (80)	3"	G3"	25	M88	22		102/97	
Φ100	4"	G4"	25	M114	28		133/128	
Φ125	5"	G5"	25	M140	29		158	
Φ150	6"	G6"	25	M164	29		183	

