



金属加强型电缆接头
Metal Cable Gland-Strengthened Type



M / PG 

材质：镍镀黄铜
夹紧爪：尼龙塑料 PA66, UL94-V2
密封件：三元乙丙、硅橡胶等
防水圈：三元乙丙、硅橡胶等
防水等级：IP68-10 巴压力
工作温度：静态：-40℃到 100℃, 短时间达 120℃
动态：-20℃到 80℃, 短时间达 100℃

Material: Nickel-plated brass
Claw: IPAG66 (Nylon), UL94-V2
Hermetic seal: EPDM, Silicone rubber
O-Ring: EPDM, Silicone rubber
Protection degree: IP68-10 bar
Temperature: Static state: -40 to 100℃, Short time to 120℃
Dynamic state: -20 to 80℃, Short time to 100℃

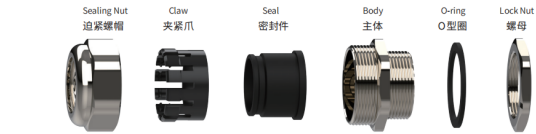

规格参数 单位: mm

 专利产品
patented product

规格 Item	适用范围 Φ Range	螺纹长度 GL Thread Length	螺纹外径 AG Thread O.D.	接合长度 H Joint Length	扳手径 Spanner size	产品编号 Code
M12×1.5	4-8	8	12	18.5	18	HX-MG.MG12
M16×1.5	5-10	9	16	21.5	22	HX-MG.MG16
M20×1.5	10-14	9.5	20	25.5	27	HX-MG.MG20
M25×1.5	13-18	11	25	28	30	HX-MG.MG25
M32×1.5	18-25	12.5	32	33	40	HX-MG.MG32
M40×1.5	25-32	15	40	35	50	HX-MG.MG40
M50×1.5	32-42	15	50	40	59	HX-MG.MG50
M63×1.5	35-45	17	63	45	67	HX-MG.MG63
PG7	4-8	8	12.5	18.5	18	HX-MG.MPG7
PG9	5-10	9	15.2	21.5	22	HX-MG.MPG9
PG11	6-12	9	18.6	24.0	24	HX-MG.MPG11
PG13.5	10-14	9.5	20.4	25.5	27	HX-MG.MPG13.5
PG16	12-16	9.5	22.5	27.0	27	HX-MG.MPG16
PG21	13-18	11	28.3	28.0	30	HX-MG.MPG21
PG29	18-25	12.5	37.0	33.0	40	HX-MG.MPG29
PG36	25-32	15	47.0	35.0	50	HX-MG.MPG36
PG42	32-42	15	54.0	40.0	59	HX-MG.MPG42
PG48	35-45	17	59.3	45.0	67	HX-MG.MPG48



金属加强型电缆接头 Metal Cable Gland Series