

金属耐高温电缆接头
Metal Cable Gland-High Temperature Resistance Type





M / PG / G / NPT

CE ROHS IP68 REACH

材质: 镀镍黄铜
密封件: 三元乙丙、硅橡胶等
防水圈: 三元乙丙、硅橡胶等
防水等级: IP68-10 巴压力
工作温度: 静态: -60°C 到 250°C

Material: Nickel-plated brass
Hermetic seal: EPDM, Silicone rubber
O-Ring: EPDM, Silicone rubber
Protection degree: IP68-10 bar
Temperature: Static state: -60 to 250°C

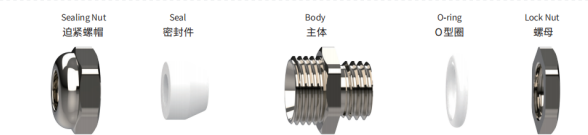

规格参数 单位: mm

专利产品
patented product

规格 Item	适用范围 Φ Range	螺纹长度 GL Thread Length	螺纹外径 AG Thread O.D.	扳手径 Spanner size	产品编号 Code
M12×1.5	4-6.5	7	12	16/14	HX-NG.M12S
M12×1.5	5-8	7	12	16/14	HX-NG.M12S-8
M14×1.5	5-8	7	14	18/17	HX-NG.M14S
M16×1.5	6-9	8	16	20/18	HX-NG.M16S
M18×1.5	8-12	8	18	22/20	HX-NG.M18S
M20×1.5	8-12	8	20	24/22	HX-NG.M20S

PG7	4-6.5	7	12.5	16/15	HX-NG.PG7S
PG9	5-8	7	15.2	18/18	HX-NG.PG9S
PG11	6-9	8	18.5	22/21	HX-NG.PG11S
PG13.5	8-12	8	20.4	24/23	HX-NG.PG13.5S



金属电缆密封接头系列 Metal Cable Gland Series